

Radome with Bolts



INSTALLATION GUIDE

1 Organize Work Site and Ensure a Safe Work Environment

- Read all instructions and review all supplied drawings & packing list prior to starting any work.
- The following guide assumes that pole & antennas have been previously installed.
- Call STEALTH® if any parts are missing (part quantities will vary per project).
- Ensure that work is performed in fair weather conditions. Installation or removal of concealment radomes is NOT recommended in windy conditions.
- Use all industry established safety practices.

PARTS LIST


- Hardware: varies per project
- Tommy tool: for attaching nylon seam bolts
- Leaf: quantity and sizes will vary per project

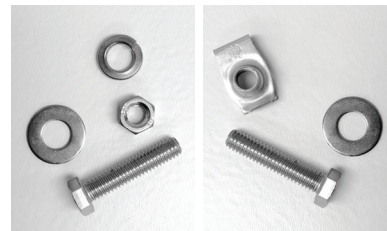


**STEALTH may not provide hardware if existing conditions are unknown. Hardware varies per project.*

2 Bolting Radome Leaves to Steel

Bolt radome leaves to steel structure per details in the provided drawings. **Do not over tighten the leaves to the steel.** The radome should be secure, while keeping its rounded shape.

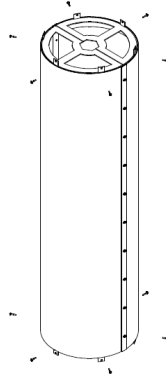

c



SMOOTH
MULTI-PART



MULTI-SIDED
MULTI-PART

3 Using the Tommy Tool

Place the Tommy Tool through the front of the non-threaded slot, then through the threaded bolt hole. Pull tight to line up the bolt holes. This will make it easier to line up the radome.



4 Bolt Attachment & Removal

To attach, tighten the bolts clockwise until snug. **Do not over tighten.** The radome should be secure, while keeping its shape. To remove, loosen bolts in a counter-clockwise direction.

